


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm		
NAME: J-CP75W-CS-3CCT-A	TYPE: 75W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 131.72 lm/W			
MODEL	J-CP75W-CS-3CCT-A	Imax (cd)	2130	S/MH(C0/180)	1.52
NOMINAL POWER(W)	75	LOR(%)	100.0	S/MH(C90/270)	1.53
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	9903.3	□ UP,DN(C0-180)	0.9,48.9
NOMINAL FLUX(lm)	9903.29	CIE CLASS	DIRECT	□ UP,DN(C180-360)	1.0,49.1
LAMPS INSIDE	1	□ up (%)	2.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	□ down (%)	98.0	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

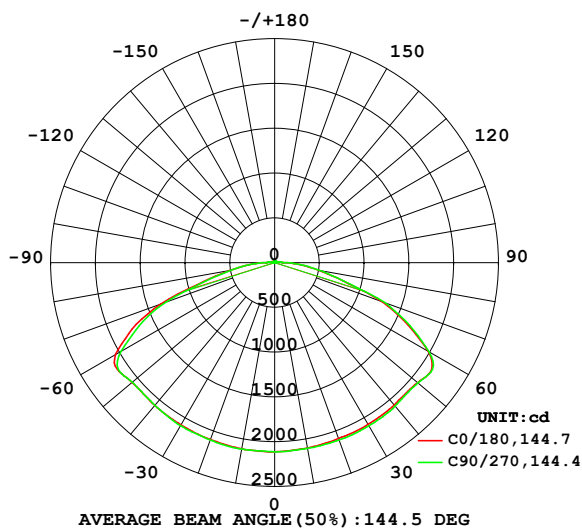

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

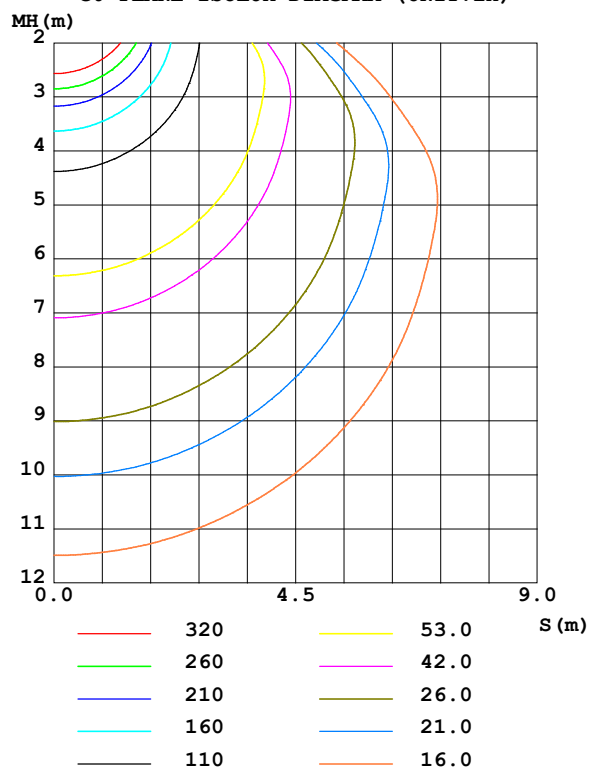

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	2110	2109	2113	2102	2101	2099	2106	2106	0- 10	201.1	201.1	2.03,2.03
20	2102	2105	2106	2097	2090	2089	2108	2098	10- 20	596.0	797.1	8.05,8.05
30	2092	2075	2101	2064	2086	2067	2104	2076	20- 30	968.2	1765	17.8,17.8
40	2082	2008	2080	2002	2076	2010	2092	2016	30- 40	1298	3063	30.9,30.9
50	2080	1928	2077	1930	2084	1938	2089	1946	40- 50	1569	4632	46.8,46.8
60	2050	1867	1978	1887	1977	1889	1989	1898	50- 60	1801	6433	65,65
70	1359	1616	1290	1611	1278	1622	1312	1646	60- 70	1727	8161	82.4,82.4
80	508.3	934.0	497.9	904.1	500.5	938.0	510.8	966.4	70- 80	1114	9275	93.7,93.7
90	105.2	205.0	102.3	187.5	103.5	172.2	113.1	190.0	80- 90	434.3	9709	98,98
100	56.93	37.40	50.45	17.58	57.68	27.33	59.03	48.38	90-100	96.54	9805	99,99
110	34.05	15.67	10.75	12.64	14.15	15.34	13.92	19.69	100-110	25.79	9831	99.3,99.3
120	12.86	12.73	12.89	13.16	16.10	16.16	15.92	15.63	110-120	16.96	9848	99.4,99.4
130	14.48	14.99	14.73	15.17	17.54	17.39	17.10	17.29	120-130	13.69	9862	99.6,99.6
140	16.53	17.26	16.72	17.51	18.61	18.95	18.46	18.89	130-140	13.11	9875	99.7,99.7
150	18.39	18.80	18.57	18.98	19.84	19.97	19.72	19.95	140-150	11.68	9887	99.8,99.8
160	19.54	19.61	19.65	19.67	20.31	20.23	20.25	20.32	150-160	9.096	9896	99.9,99.9
170	20.10	20.18	20.22	20.18	20.40	20.35	20.39	20.46	160-170	5.705	9901	100,100
180	20.49	20.53	20.52	20.58	20.51	20.53	20.50	20.56	170-180	1.945	9903	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3817.4 lm

%lum = 38.5%

%lamp = 38.5%

Conical surface Flux(130deg): 7343.7 lm

%lum = 74.2%


%lamp = 74.2%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-05-05

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

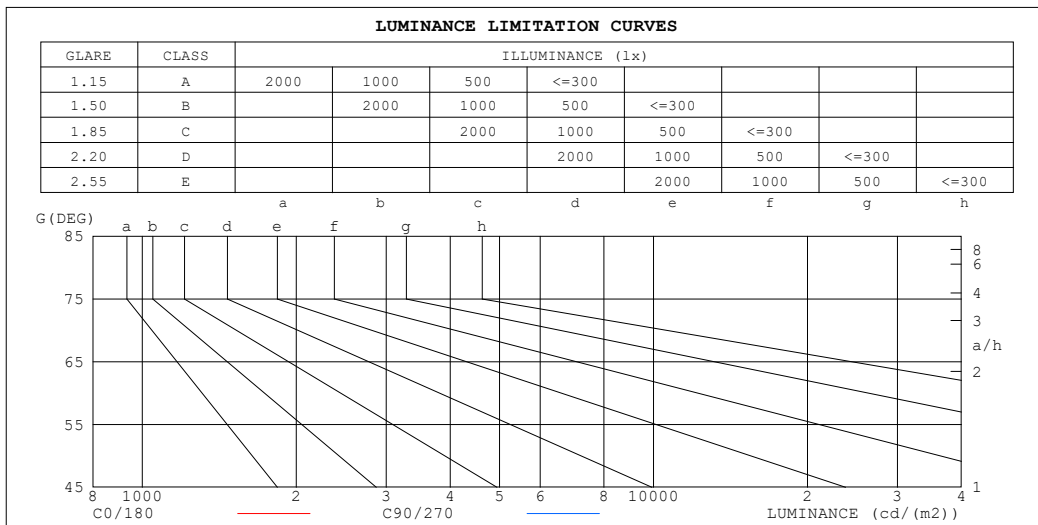


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 9.680m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	.00	.95	.90	.97	.93	.88	.93	.89	.85	.88	.85	.82	.84	.82	.79	.77
2.0	.85	.77	.70	.83	.75	.69	.79	.72	.67	.75	.70	.65	.71	.67	.63	.61
3.0	.73	.63	.56	.71	.62	.55	.67	.60	.54	.64	.58	.53	.61	.56	.51	.49
4.0	.63	.53	.46	.62	.52	.45	.59	.51	.44	.56	.49	.43	.54	.48	.43	.40
5.0	.56	.46	.38	.54	.45	.38	.52	.44	.37	.50	.42	.37	.47	.41	.36	.34
6.0	.49	.40	.33	.48	.39	.32	.46	.38	.32	.44	.37	.31	.42	.36	.31	.29
7.0	.44	.35	.28	.43	.34	.28	.42	.34	.28	.40	.33	.27	.38	.32	.27	.25
8.0	.40	.31	.25	.39	.31	.25	.38	.30	.24	.36	.29	.24	.35	.28	.24	.22
9.0	.37	.28	.22	.36	.28	.22	.35	.27	.21	.33	.26	.21	.32	.26	.21	.19
10.0	.34	.25	.20	.33	.25	.19	.32	.24	.19	.31	.24	.19	.30	.23	.19	.17

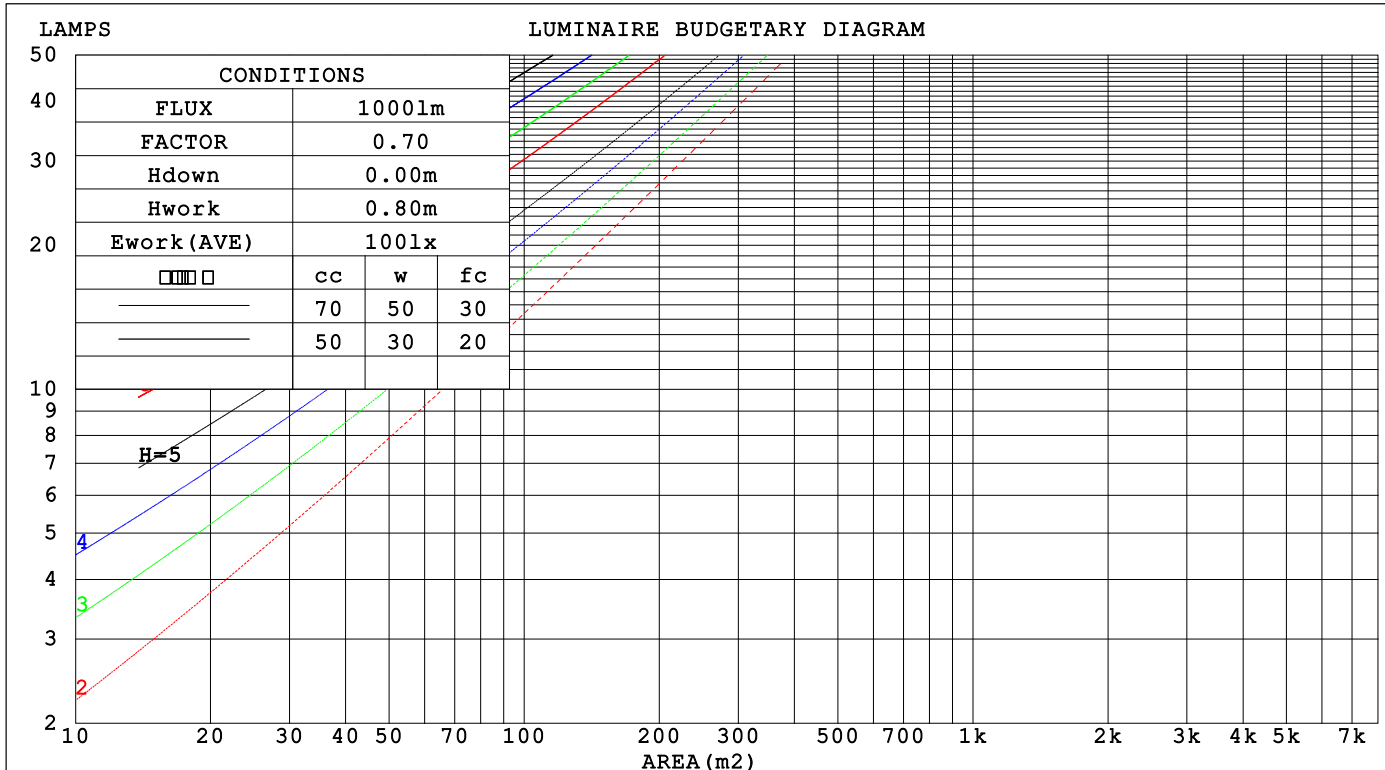

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

☐ cc	80%			70%			50%			30%			10%			0														
☐ w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
☐ fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.377	.214	.068	.369	.210	.067	.354	.203	.065	.341	.197	.063	.328	.190	.061															
2.0	.342	.188	.058	.335	.185	.057	.322	.179	.056	.310	.174	.054	.299	.169	.053															
3.0	.310	.165	.049	.303	.163	.049	.292	.158	.048	.281	.154	.047	.271	.150	.046															
4.0	.281	.146	.043	.275	.144	.043	.265	.140	.042	.255	.137	.041	.246	.134	.041															
5.0	.256	.130	.038	.251	.129	.038	.242	.126	.037	.233	.123	.037	.225	.120	.036															
6.0	.235	.118	.034	.230	.116	.033	.222	.114	.033	.214	.111	.033	.207	.109	.032															
7.0	.216	.107	.030	.212	.106	.030	.205	.103	.030	.198	.101	.029	.191	.099	.029															
8.0	.200	.098	.028	.197	.097	.027	.190	.095	.027	.184	.093	.027	.178	.091	.027															
9.0	.186	.090	.025	.183	.089	.025	.177	.088	.025	.171	.086	.025	.166	.084	.024															
10.0	.174	.083	.023	.171	.083	.023	.166	.081	.023	.161	.080	.023	.156	.078	.022															

☐ cc	80%			70%			50%			30%			10%			0	
☐ w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
☐ fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.205	.205	.205	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022		
1.0	.200	.171	.144	.171	.146	.124	.117	.101	.086	.067	.058	.050	.022	.019	.016		
2.0	.194	.147	.107	.166	.126	.093	.114	.087	.065	.066	.051	.038	.021	.016	.012		
3.0	.187	.130	.084	.161	.112	.073	.110	.078	.051	.064	.045	.030	.020	.015	.010		
4.0	.180	.117	.069	.154	.101	.060	.106	.070	.042	.061	.041	.025	.020	.013	.008		
5.0	.172	.107	.059	.148	.093	.051	.102	.065	.036	.059	.038	.021	.019	.012	.007		
6.0	.165	.099	.052	.142	.086	.045	.098	.060	.032	.057	.035	.019	.018	.012	.006		
7.0	.157	.092	.046	.135	.080	.040	.094	.056	.029	.054	.033	.017	.018	.011	.006		
8.0	.150	.086	.042	.130	.075	.037	.090	.053	.026	.052	.031	.016	.017	.010	.005		
9.0	.144	.081	.039	.124	.071	.034	.086	.050	.024	.050	.029	.015	.016	.010	.005		
10.0	.138	.077	.037	.119	.067	.032	.082	.047	.023	.048	.028	.014	.016	.009	.005		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm										
NAME: CP02G-75L-CS-3CCT-Z					TYPE: 75W			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 1		
MFR.: EVERFINE					SUR.: 0.25*0.25			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.6	29.2	27.9	29.5	29.7	27.4	29.1	27.7	29.4	29.6
3H	29.8	31.3	30.1	31.6	31.9	29.6	31.1	29.9	31.4	31.7
4H	30.5	31.9	30.8	32.2	32.5	30.2	31.7	30.6	32.0	32.3
6H	30.9	32.3	31.2	32.6	32.9	30.7	32.1	31.0	32.4	32.7
8H	31.0	32.4	31.4	32.7	33.1	30.8	32.2	31.2	32.5	32.9
12H	31.2	32.5	31.5	32.8	33.2	31.0	32.3	31.4	32.6	33.0
4H 2H	28.4	29.9	28.8	30.2	30.5	28.4	29.8	28.7	30.1	30.5
3H	30.9	32.2	31.3	32.5	32.9	30.7	32.0	31.1	32.3	32.7
4H	31.7	32.9	32.1	33.3	33.6	31.5	32.7	31.9	33.1	33.5
6H	32.2	33.3	32.7	33.7	34.1	32.1	33.1	32.5	33.5	34.0
8H	32.4	33.5	32.9	33.9	34.3	32.3	33.3	32.7	33.7	34.1
12H	32.6	33.6	33.1	34.0	34.5	32.5	33.4	33.0	33.8	34.3
8H 4H	32.2	33.2	32.7	33.6	34.1	32.1	33.1	32.5	33.5	33.9
6H	33.0	33.9	33.5	34.3	34.8	32.9	33.7	33.4	34.2	34.6
8H	33.3	34.1	33.8	34.6	35.1	33.2	34.0	33.7	34.4	34.9
12H	33.6	34.3	34.1	34.8	35.3	33.5	34.2	34.0	34.7	35.2
12H 4H	32.3	33.2	32.7	33.6	34.1	32.1	33.1	32.6	33.5	33.9
6H	33.2	33.9	33.7	34.4	34.9	33.1	33.8	33.6	34.3	34.8
8H	33.6	34.3	34.1	34.7	35.3	33.5	34.1	34.0	34.6	35.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.5					+ 0.3 / - 0.5				

CIE Pub.117, 9903 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 8.0)
Area: 0.0625 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	50	37	29	49	37	29	48	36	29	22
0.80	60	46	38	58	46	38	56	45	37	30
1.00	68	55	47	67	54	46	64	56	46	37
1.25	75	63	55	74	62	54	71	61	53	45
1.50	81	69	61	79	68	60	76	66	59	50
2.00	89	78	70	87	77	70	83	74	68	59
2.50	94	84	77	91	82	76	87	80	74	64
3.00	97	89	82	95	87	81	90	84	79	69
4.00	102	95	89	100	93	88	95	90	85	75
5.00	105	99	94	103	97	93	98	93	89	79
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

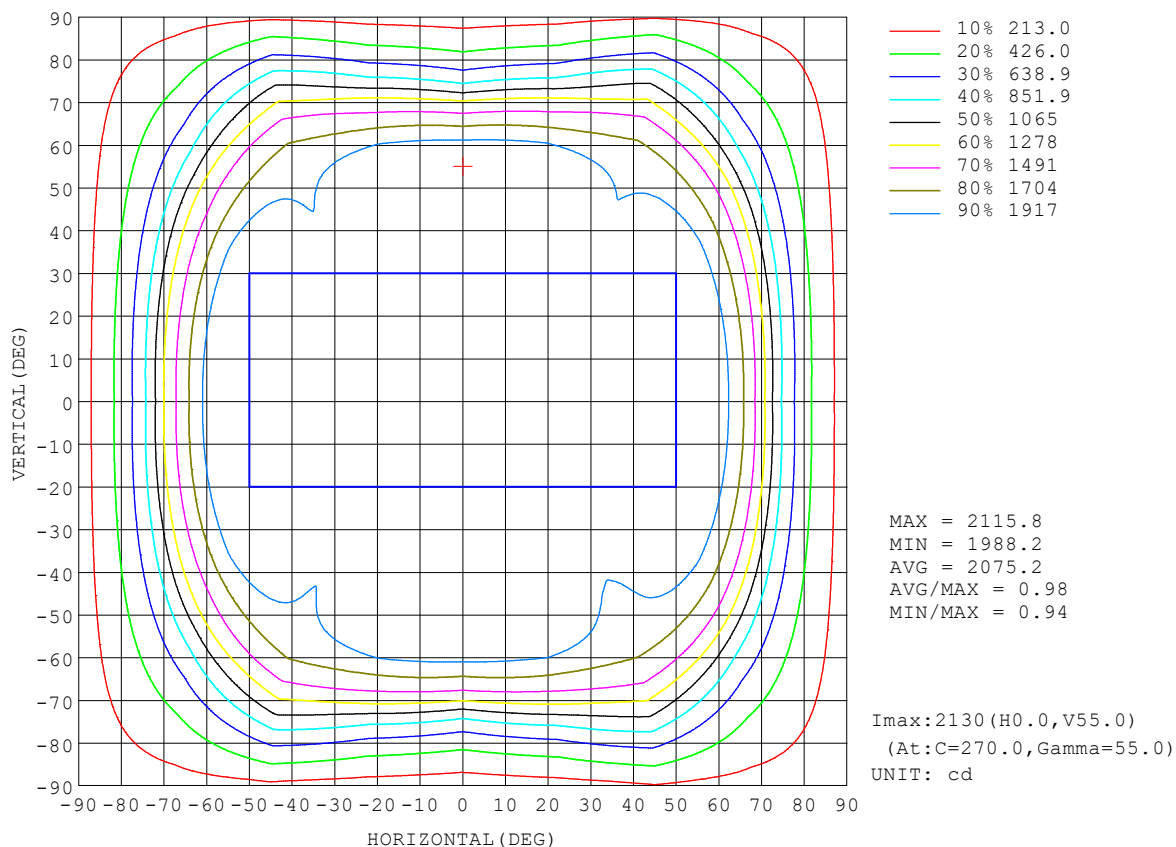


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

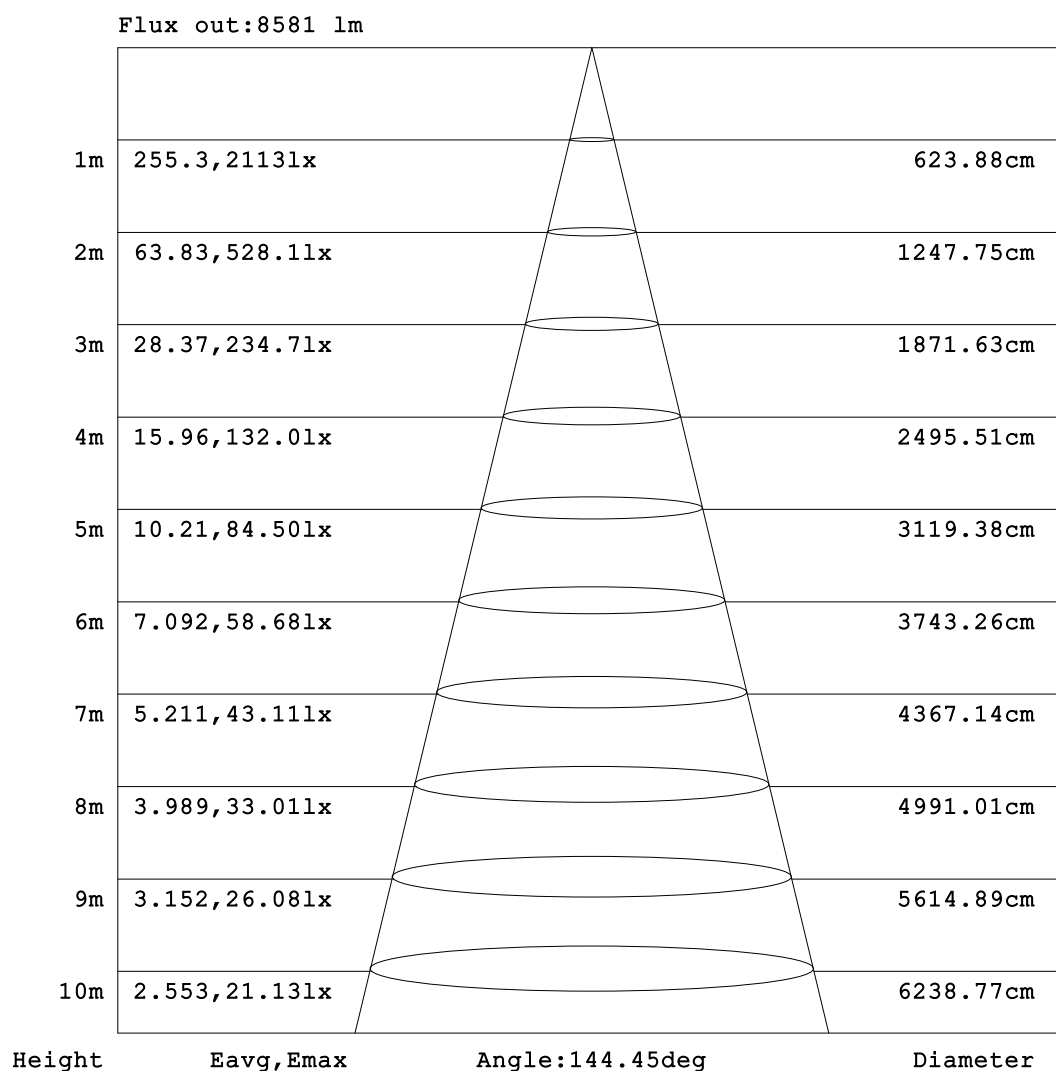


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

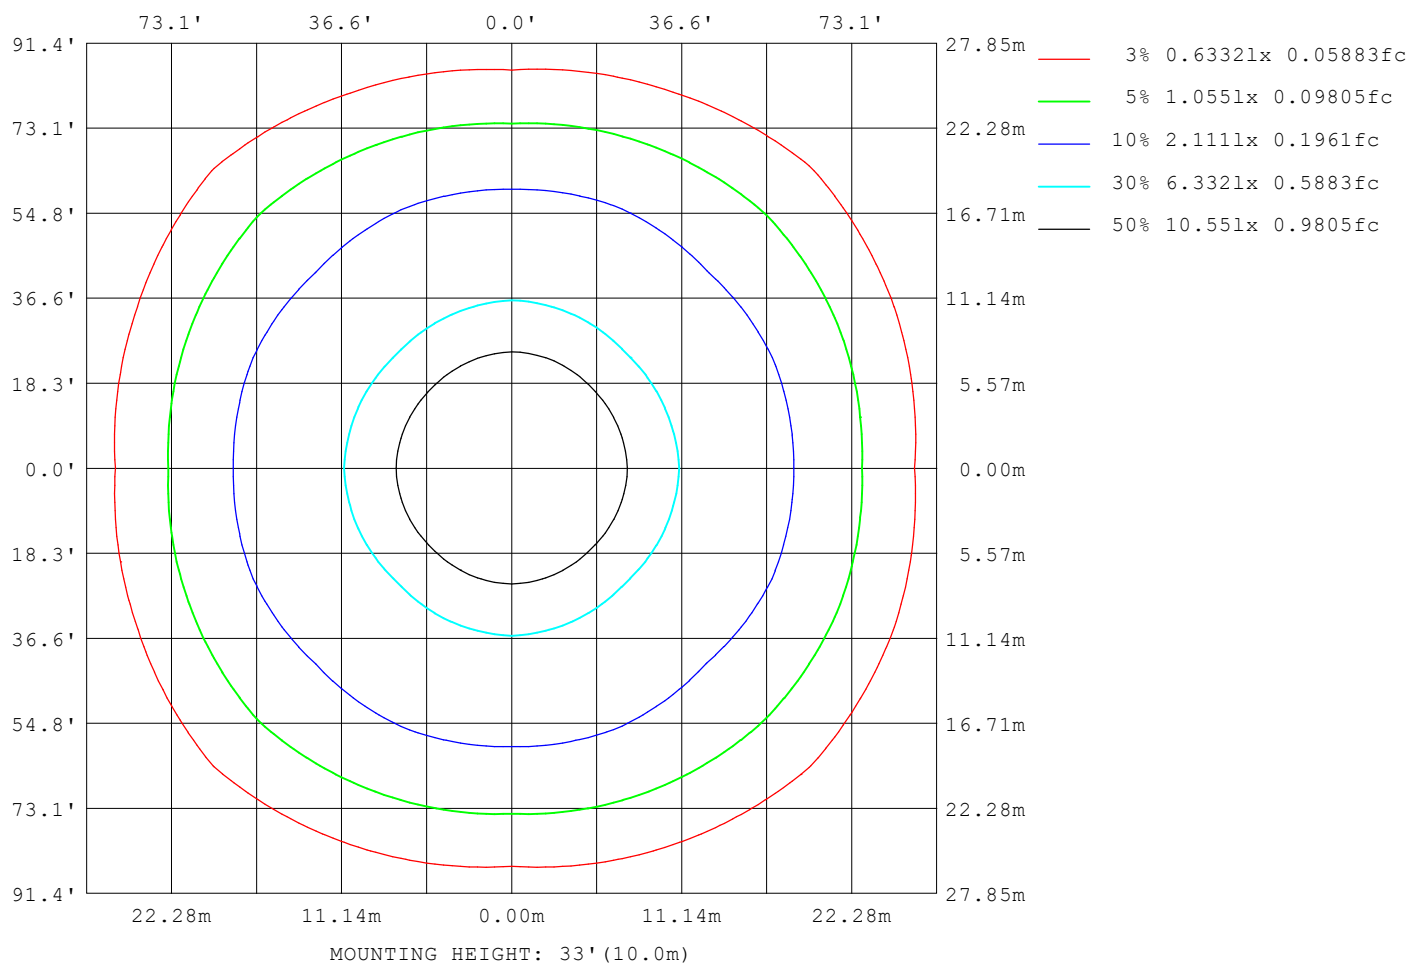

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:9903.29x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	64340
L_0~180 (75) av	49879
L_0~180 (85) av	53903
L_90~270 (65) av	63093
L_90~270 (75) av	49389
L_90~270 (85) av	54542
L_45 (65) av	68378
L_45 (75) av	82063
L_45 (85) av	100372

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

Planar Illuminance Curve

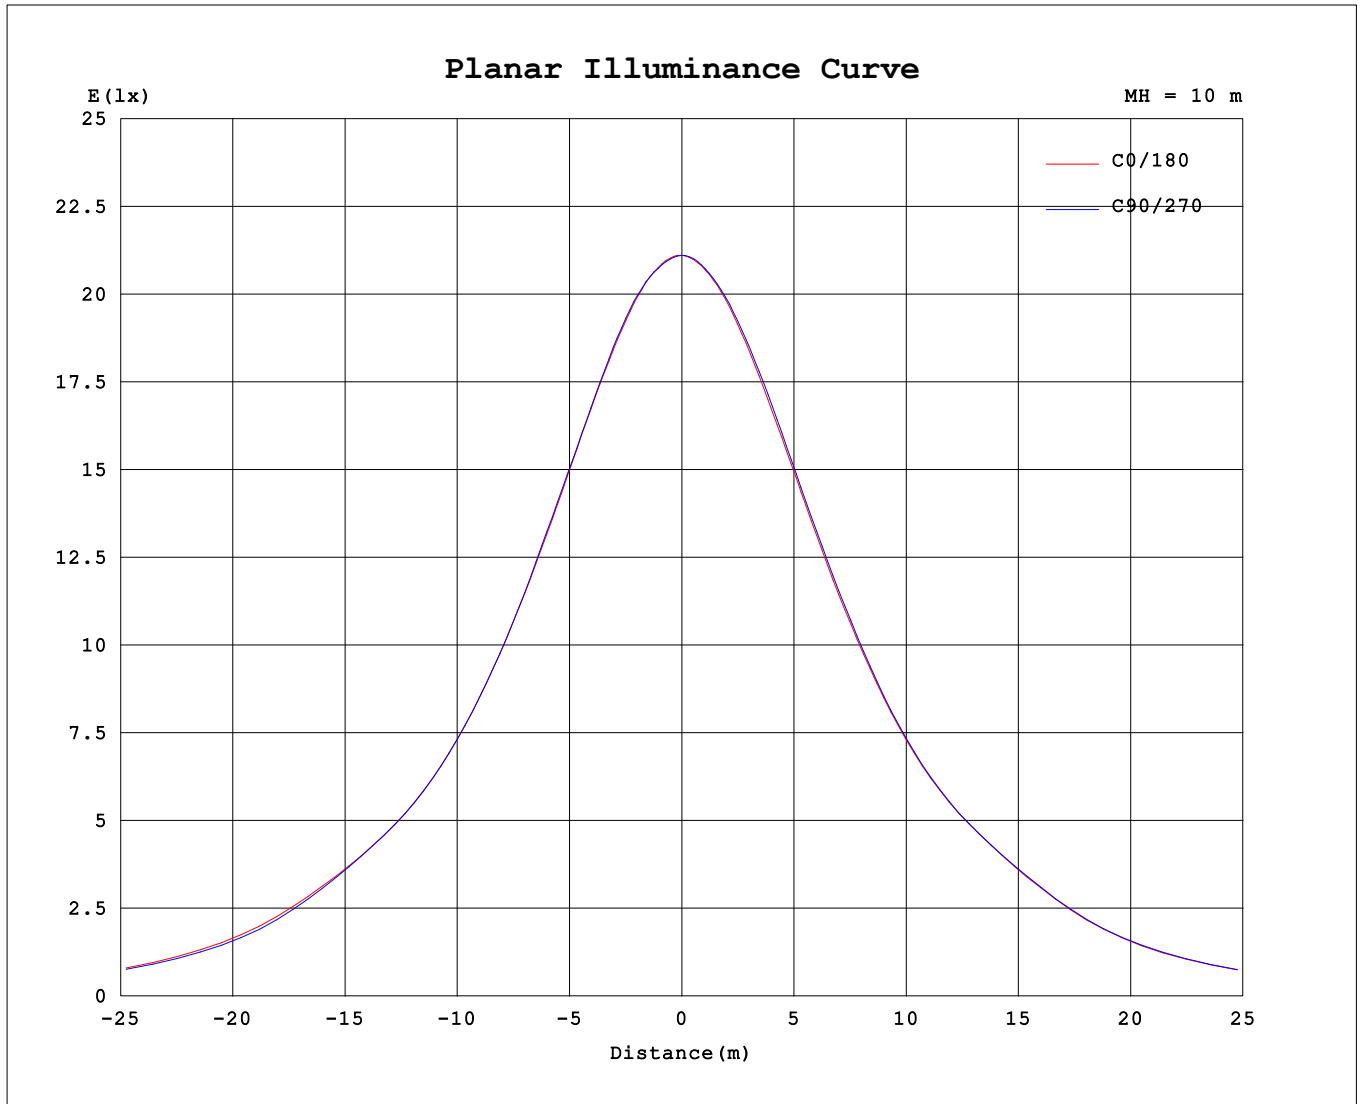

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.19V I:0.6339A P:75.183W PF:0.9950 Freq:60.01Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:9903.29x1 lm		
NAME: CP02G-75L-CS-3CCT-Z			TYPE: 75W			WEIGHT:		
SPEC.: 3000K			DIM.:			SERIAL No.: 1		
MFR.: EVERFINE			SUR.: 0.25*0.25			Shielding Angle:		

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2111	2111	2112	2111	2111	2112	2113	2110	2111	2111	2112	2111	2111	2112	2113	2110			
5	2112	2110	2110	2110	2108	2108	2105	2104	2105	2105	2105	2106	2107	2109	2109	2110			
10	2110	2108	2109	2112	2113	2110	2102	2098	2101	2099	2099	2102	2106	2106	2106	2107			
15	2106	2105	2112	2113	2113	2108	2104	2094	2095	2092	2096	2100	2106	2107	2105	2101			
20	2102	2101	2105	2107	2106	2101	2097	2089	2090	2086	2089	2096	2108	2107	2098	2094			
25	2097	2095	2093	2099	2102	2091	2084	2086	2089	2083	2081	2093	2107	2105	2091	2088			
30	2092	2085	2075	2089	2101	2084	2064	2078	2086	2077	2067	2084	2104	2095	2076	2076			
35	2088	2070	2045	2072	2091	2068	2036	2061	2081	2062	2042	2071	2102	2083	2049	2062			
40	2082	2051	2008	2046	2080	2044	2002	2044	2076	2046	2010	2054	2092	2068	2016	2044			
45	2071	2029	1967	2025	2071	2026	1964	2022	2066	2026	1974	2028	2077	2042	1981	2022			
50	2080	2009	1928	2006	2077	2011	1930	2013	2084	2015	1938	2009	2089	2028	1946	2006			
55	2120	2014	1898	2005	2115	2016	1910	2031	2124	2028	1913	2017	2130	2038	1922	2015			
60	2050	2003	1867	1970	1978	1983	1887	1989	1977	1990	1889	1983	1989	2001	1898	2008			
65	1756	1816	1788	1755	1669	1751	1807	1742	1643	1741	1807	1750	1664	1758	1823	1829			
70	1359	1517	1616	1453	1290	1450	1611	1420	1278	1428	1622	1441	1312	1449	1646	1528			
75	822	1037	1324	1021	793	1001	1301	978	791	986	1329	1018	805	1006	1356	1065			
80	508	638	934	638	498	624	904	616	500	625	938	643	511	636	966	657			
85	293	365	548	367	291	358	522	355	294	363	546	374	303	372	571	379			
90	105	133	205	132	102	127	187	128	104	132	172	137	113	140	190	142			
95	75.4	82.8	105	84.8	74.0	76.5	97.4	77.7	76.5	82.2	105	83.4	78.6	88.4	110	89.0			
100	56.9	56.0	37.4	42.2	50.4	40.7	17.6	46.1	57.7	48.7	27.3	48.6	59.0	49.4	48.4	59.6			
105	42.2	35.3	23.6	9.46	9.54	9.87	11.5	9.68	19.7	13.1	13.1	13.1	14.4	12.8	25.4	39.6			
110	34.1	28.5	15.7	16.5	10.8	16.2	12.6	12.8	14.2	14.5	15.3	16.9	13.9	16.0	19.7	32.6			
115	27.2	20.9	11.7	14.7	20.0	15.2	11.8	11.9	17.7	15.1	14.8	17.4	21.6	17.4	14.8	24.4			
120	12.9	12.7	12.7	12.8	12.9	12.8	13.2	13.0	16.1	15.9	16.2	15.7	15.9	15.8	15.6	15.7			
125	13.7	13.5	13.8	13.9	13.8	13.8	14.0	15.9	16.6	18.6	16.6	16.4	16.4	16.6	16.5	16.3			
130	14.5	14.6	15.0	14.9	14.7	14.8	15.2	15.1	17.5	17.4	17.4	17.1	17.1	17.3	17.3	17.0			
135	15.5	15.7	16.1	15.9	15.7	15.9	16.4	16.1	17.9	18.1	18.2	17.9	17.8	18.0	18.1	17.8			
140	16.5	16.8	17.3	16.9	16.7	17.0	17.5	17.1	18.6	18.7	19.0	18.7	18.5	18.7	18.9	18.6			
145	17.5	17.8	18.2	17.9	17.7	18.0	18.4	18.1	19.3	19.4	19.6	19.4	19.2	19.3	19.5	19.3			
150	18.4	18.6	18.8	18.7	18.6	18.7	19.0	18.8	19.8	19.8	20.0	19.9	19.7	19.8	20.0	19.8			
155	19.1	19.1	19.3	19.2	19.2	19.3	19.4	19.4	20.2	20.2	20.2	20.2	20.1	20.2	20.2	20.2			
160	19.5	19.5	19.6	19.6	19.7	19.6	19.7	19.7	20.3	20.3	20.2	20.2	20.2	20.2	20.3	20.3			
165	19.9	19.9	19.9	20.0	20.0	19.9	20.0	20.0	20.4	20.4	20.3	20.3	20.4	20.4	20.4	20.4			
170	20.1	20.1	20.2	20.2	20.2	20.2	20.2	20.2	20.4	20.4	20.3	20.3	20.4	20.5	20.5	20.4			
175	20.3	20.4	20.4	20.4	20.4	20.4	20.4	20.4	20.4	20.5	20.4	20.4	20.4	20.5	20.5	20.5			
180	20.5	20.5	20.5	20.5	20.5	20.5	20.6	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.6	20.5			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks: