


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm		
NAME: J-CP75W-CS-3CCT-A	TYPE: 75W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 148.58 lm/W			
MODEL	J-CP75W-CS-3CCT-A	Imax (cd)	2311	S/MH(C0/180)	1.52
NOMINAL POWER(W)	75	LOR(%)	100.0	S/MH(C90/270)	1.53
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	10746	□ UP,DN(C0-180)	1.0,48.9
NOMINAL FLUX(lm)	10745.8	CIE CLASS	DIRECT	□ UP,DN(C180-360)	1.1,49.1
LAMPS INSIDE	1	□ up (%)	2.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	□ down (%)	98.0	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

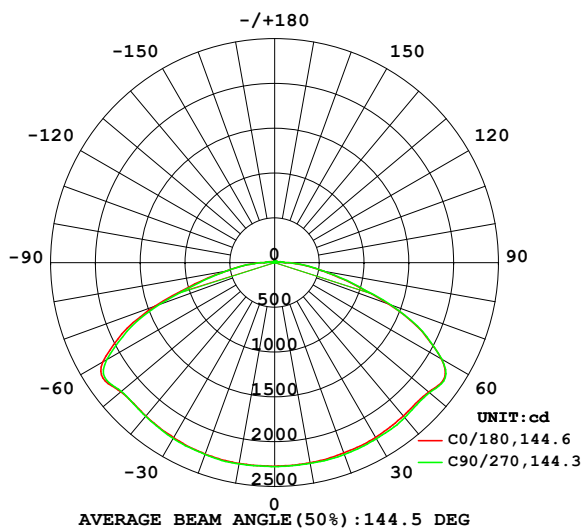

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

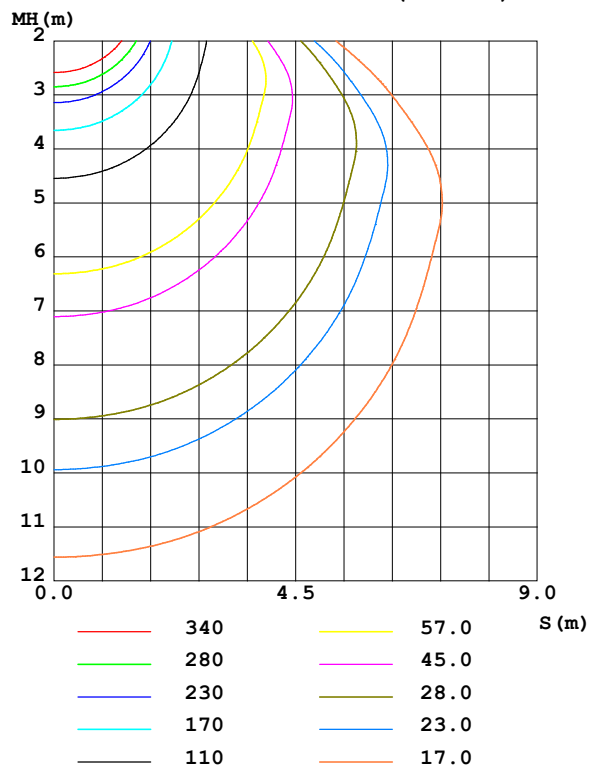

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	2277	2278	2282	2277	2269	2272	2275	2279	0- 10	217.2	217.2	2.02,2.02
20	2273	2283	2278	2277	2261	2269	2280	2282	10- 20	645.6	862.9	8.03,8.03
30	2256	2250	2267	2242	2253	2243	2272	2254	20- 30	1049	1912	17.8,17.8
40	2237	2169	2240	2165	2235	2173	2259	2177	30- 40	1403	3315	30.9,30.9
50	2244	2074	2237	2075	2247	2089	2259	2093	40- 50	1692	5007	46.6,46.6
60	2216	2018	2163	2032	2150	2042	2155	2049	50- 60	1946	6953	64.7,64.7
70	1423	1778	1365	1776	1359	1783	1383	1813	60- 70	1878	8832	82.2,82.2
80	556.6	1018	548.8	1000	549.6	1033	563.7	1057	70- 80	1216	10047	93.5,93.5
90	124.4	201.3	121.2	195.8	122.5	206.9	131.8	222.2	80- 90	479.2	10526	98,98
100	64.86	43.53	57.62	21.10	65.76	32.05	67.14	56.15	90-100	112.5	10639	99,99
110	37.81	17.07	11.58	13.68	15.26	16.65	15.05	21.39	100-110	28.77	10668	99.3,99.3
120	13.89	13.77	13.86	14.17	17.31	17.44	17.17	16.91	110-120	18.41	10686	99.4,99.4
130	15.66	16.20	15.91	16.33	18.91	18.77	18.47	18.74	120-130	14.77	10701	99.6,99.6
140	17.91	18.63	18.08	18.80	20.18	20.53	20.04	20.50	130-140	14.17	10715	99.7,99.7
150	19.87	20.28	20.02	20.43	21.43	21.57	21.32	21.59	140-150	12.63	10728	99.8,99.8
160	21.08	21.16	21.19	21.21	22.01	21.95	21.95	22.03	150-160	9.830	10738	99.9,99.9
170	21.70	21.79	21.83	21.74	22.02	22.01	22.02	22.10	160-170	6.164	10744	100,100
180	22.10	22.21	22.12	22.22	22.10	22.17	22.12	22.22	170-180	2.100	10746	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 4128.9 lm

%lum = 38.4%

%lamp = 38.4%

Conical surface Flux(130deg): 7943.4 lm

%lum = 73.9%


%lamp = 73.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-05-05

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

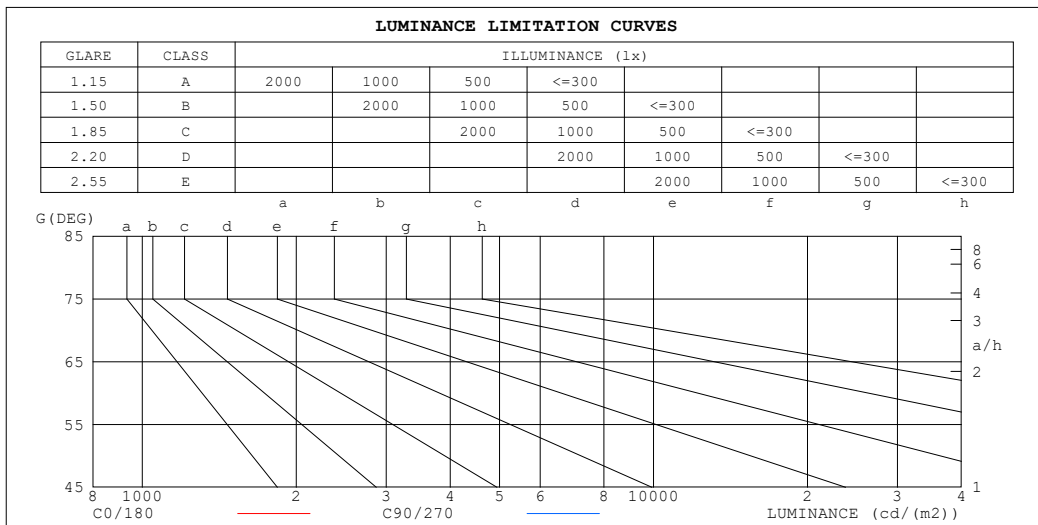


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 9.680m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	.00	.95	.90	.97	.92	.88	.93	.89	.85	.88	.85	.82	.84	.82	.79	.77
2.0	.85	.77	.70	.82	.75	.69	.78	.72	.67	.75	.69	.65	.71	.67	.63	.61
3.0	.73	.63	.56	.71	.62	.55	.67	.60	.54	.64	.58	.52	.61	.56	.51	.49
4.0	.63	.53	.46	.62	.52	.45	.59	.51	.44	.56	.49	.43	.53	.47	.42	.40
5.0	.56	.46	.38	.54	.45	.38	.52	.43	.37	.49	.42	.36	.47	.41	.36	.33
6.0	.49	.40	.32	.48	.39	.32	.46	.38	.32	.44	.37	.31	.42	.36	.31	.28
7.0	.44	.35	.28	.43	.34	.28	.42	.33	.27	.40	.33	.27	.38	.32	.27	.25
8.0	.40	.31	.25	.39	.31	.24	.38	.30	.24	.36	.29	.24	.35	.28	.24	.21
9.0	.37	.28	.22	.36	.27	.22	.35	.27	.21	.33	.26	.21	.32	.26	.21	.19
10.0	.34	.25	.20	.33	.25	.19	.32	.24	.19	.31	.24	.19	.30	.23	.19	.17

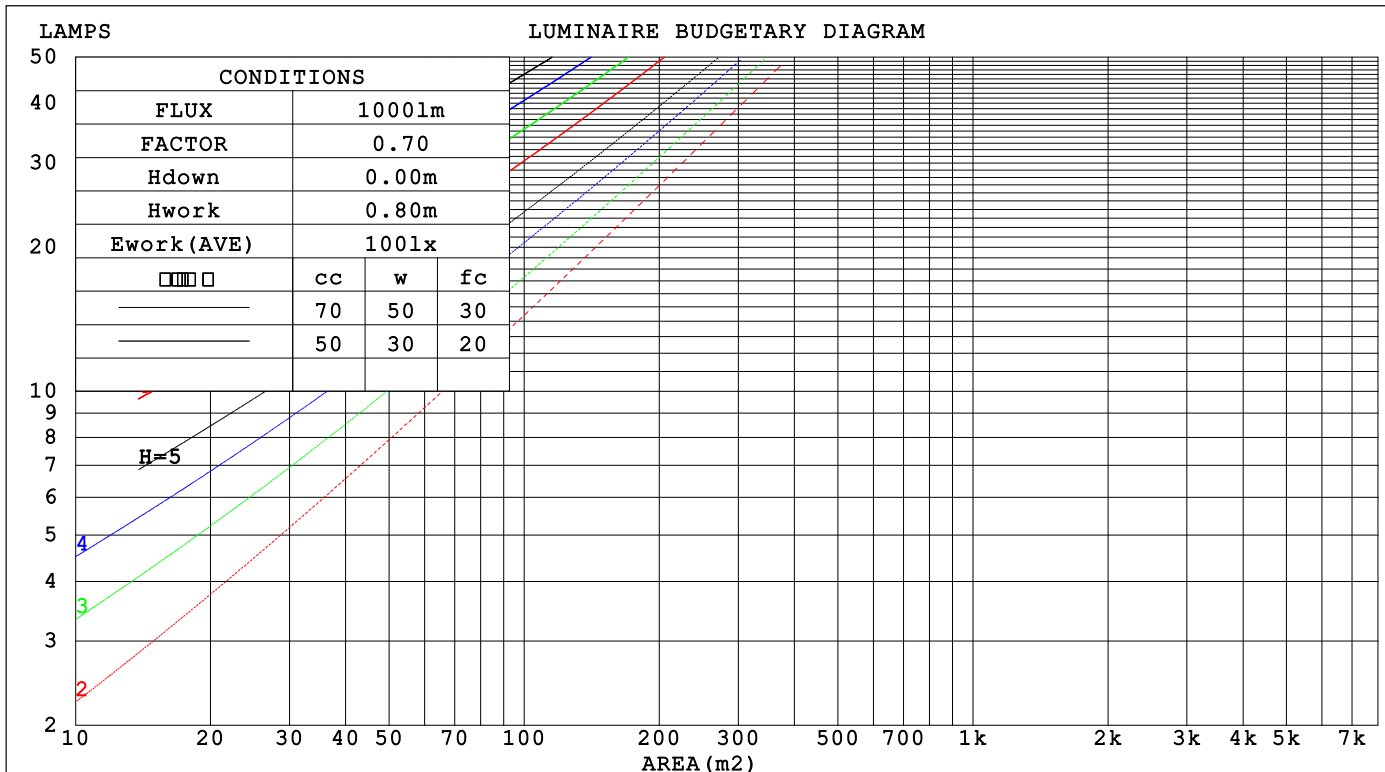

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

☐ cc	80%			70%			50%			30%			10%			0														
☐ w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
☐ fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.378	.215	.068	.370	.211	.067	.355	.204	.065	.342	.197	.063	.329	.191	.062															
2.0	.343	.188	.058	.336	.185	.057	.323	.180	.056	.311	.174	.055	.299	.169	.053															
3.0	.310	.165	.049	.304	.163	.049	.292	.158	.048	.281	.154	.047	.271	.150	.046															
4.0	.281	.146	.043	.275	.144	.043	.265	.140	.042	.255	.137	.041	.246	.134	.041															
5.0	.256	.131	.038	.251	.129	.038	.242	.126	.037	.233	.123	.037	.225	.120	.036															
6.0	.235	.118	.034	.230	.116	.033	.222	.114	.033	.214	.111	.033	.207	.109	.032															
7.0	.216	.107	.030	.212	.106	.030	.205	.103	.030	.198	.101	.029	.191	.099	.029															
8.0	.200	.098	.028	.197	.097	.027	.190	.095	.027	.184	.093	.027	.178	.091	.027															
9.0	.186	.090	.025	.183	.089	.025	.177	.088	.025	.171	.086	.025	.166	.084	.024															
10.0	.174	.084	.023	.171	.083	.023	.166	.081	.023	.160	.080	.023	.156	.078	.022															

☐ cc	80%			70%			50%			30%			10%			0	
☐ w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
☐ fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022		
1.0	.201	.171	.145	.172	.147	.124	.117	.101	.086	.068	.058	.050	.022	.019	.016		
2.0	.195	.147	.108	.167	.127	.093	.114	.088	.065	.066	.051	.038	.021	.017	.012		
3.0	.188	.130	.084	.161	.113	.073	.111	.078	.051	.064	.046	.030	.021	.015	.010		
4.0	.181	.118	.069	.155	.102	.060	.107	.071	.043	.062	.041	.025	.020	.014	.008		
5.0	.173	.108	.059	.149	.093	.052	.102	.065	.036	.059	.038	.022	.019	.012	.007		
6.0	.165	.099	.052	.142	.086	.045	.098	.060	.032	.057	.035	.019	.018	.012	.006		
7.0	.158	.093	.047	.136	.080	.041	.094	.056	.029	.055	.033	.017	.018	.011	.006		
8.0	.151	.087	.043	.130	.075	.037	.090	.053	.027	.052	.031	.016	.017	.010	.005		
9.0	.144	.082	.040	.124	.071	.035	.086	.050	.025	.050	.030	.015	.016	.010	.005		
10.0	.138	.078	.037	.119	.068	.033	.083	.048	.023	.048	.028	.014	.016	.009	.005		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm										
NAME: CP02G-75L-CS-3CCT-Z					TYPE: 75W			WEIGHT:		
SPEC.: 4000K					DIM.:			SERIAL No.: 1		
MFR.: EVERFINE					SUR.: 0.25*0.25			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.8	29.5	28.1	29.7	30.0	27.7	29.4	28.0	29.6	29.9
3H	30.0	31.5	30.3	31.8	32.1	29.8	31.4	30.2	31.7	32.0
4H	30.7	32.1	31.0	32.5	32.8	30.5	32.0	30.9	32.3	32.6
6H	31.1	32.5	31.5	32.8	33.2	31.0	32.4	31.3	32.7	33.0
8H	31.3	32.6	31.7	33.0	33.3	31.1	32.5	31.5	32.8	33.2
12H	31.4	32.7	31.8	33.1	33.4	31.3	32.6	31.7	32.9	33.3
4H 2H	28.7	30.2	29.1	30.5	30.8	28.7	30.1	29.0	30.4	30.7
3H	31.1	32.4	31.5	32.7	33.1	31.0	32.3	31.4	32.6	33.0
4H	31.9	33.1	32.3	33.5	33.9	31.8	33.0	32.2	33.4	33.7
6H	32.5	33.6	32.9	34.0	34.4	32.4	33.5	32.8	33.9	34.3
8H	32.7	33.7	33.2	34.1	34.6	32.6	33.6	33.1	34.0	34.5
12H	32.9	33.8	33.4	34.3	34.7	32.8	33.7	33.3	34.2	34.6
8H 4H	32.5	33.5	32.9	33.9	34.3	32.4	33.4	32.8	33.8	34.2
6H	33.3	34.1	33.8	34.6	35.1	33.2	34.0	33.7	34.5	35.0
8H	33.6	34.4	34.1	34.8	35.3	33.5	34.3	34.0	34.8	35.3
12H	33.9	34.6	34.4	35.1	35.6	33.9	34.5	34.4	35.0	35.5
12H 4H	32.5	33.5	33.0	33.9	34.3	32.4	33.4	32.9	33.8	34.2
6H	33.5	34.2	34.0	34.7	35.2	33.4	34.1	33.9	34.6	35.1
8H	33.9	34.5	34.4	35.0	35.6	33.8	34.5	34.3	35.0	35.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.3				
2.0H	+ 0.3 / - 0.6					+ 0.3 / - 0.6				

CIE Pub.117, 10746 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 8.2)
Area: 0.0625 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	50	37	29	49	37	29	48	36	29	22
0.80	60	46	38	58	46	38	56	45	37	29
1.00	68	55	46	67	54	46	64	56	46	37
1.25	75	63	54	74	62	54	71	60	53	45
1.50	81	69	61	79	68	60	75	66	59	50
2.00	89	78	70	87	77	69	83	74	68	59
2.50	93	84	76	91	82	75	87	79	73	64
3.00	97	89	82	95	87	81	90	84	79	69
4.00	102	95	89	100	93	88	95	90	85	75
5.00	105	99	94	103	97	92	98	93	89	79
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

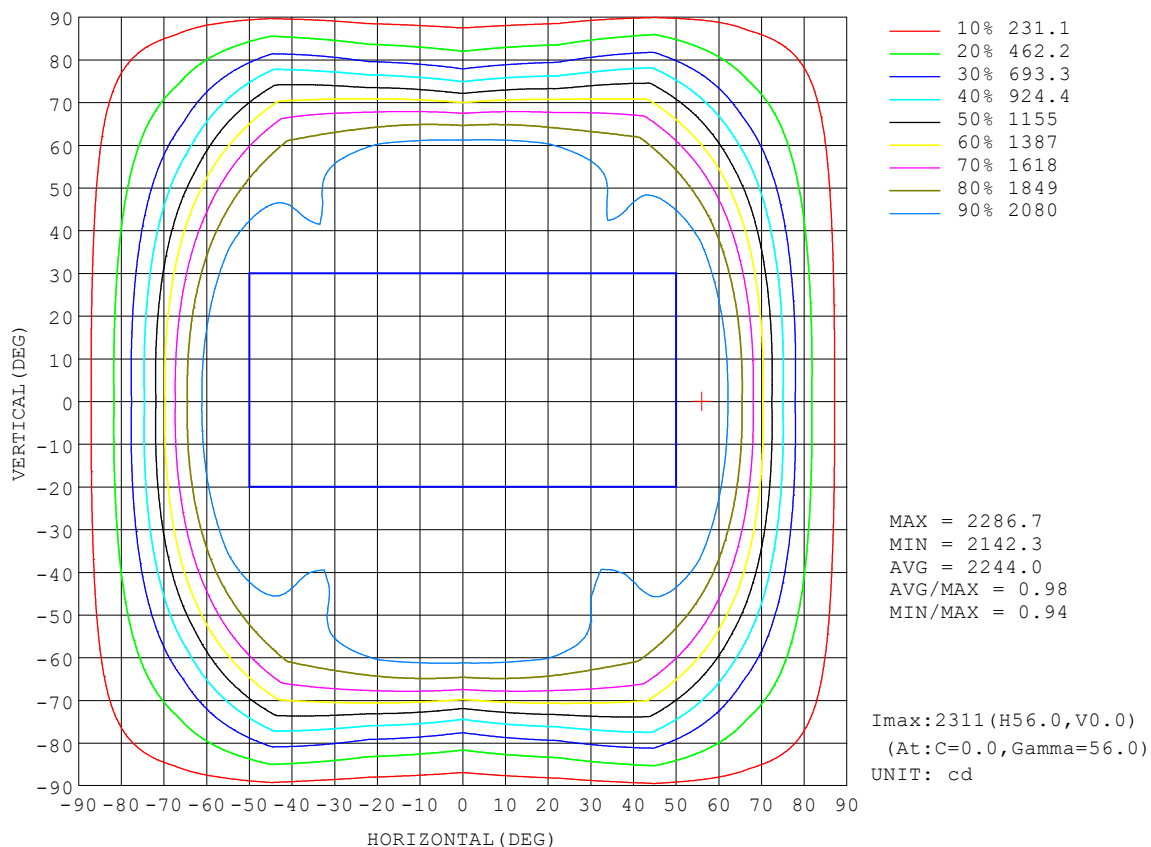


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

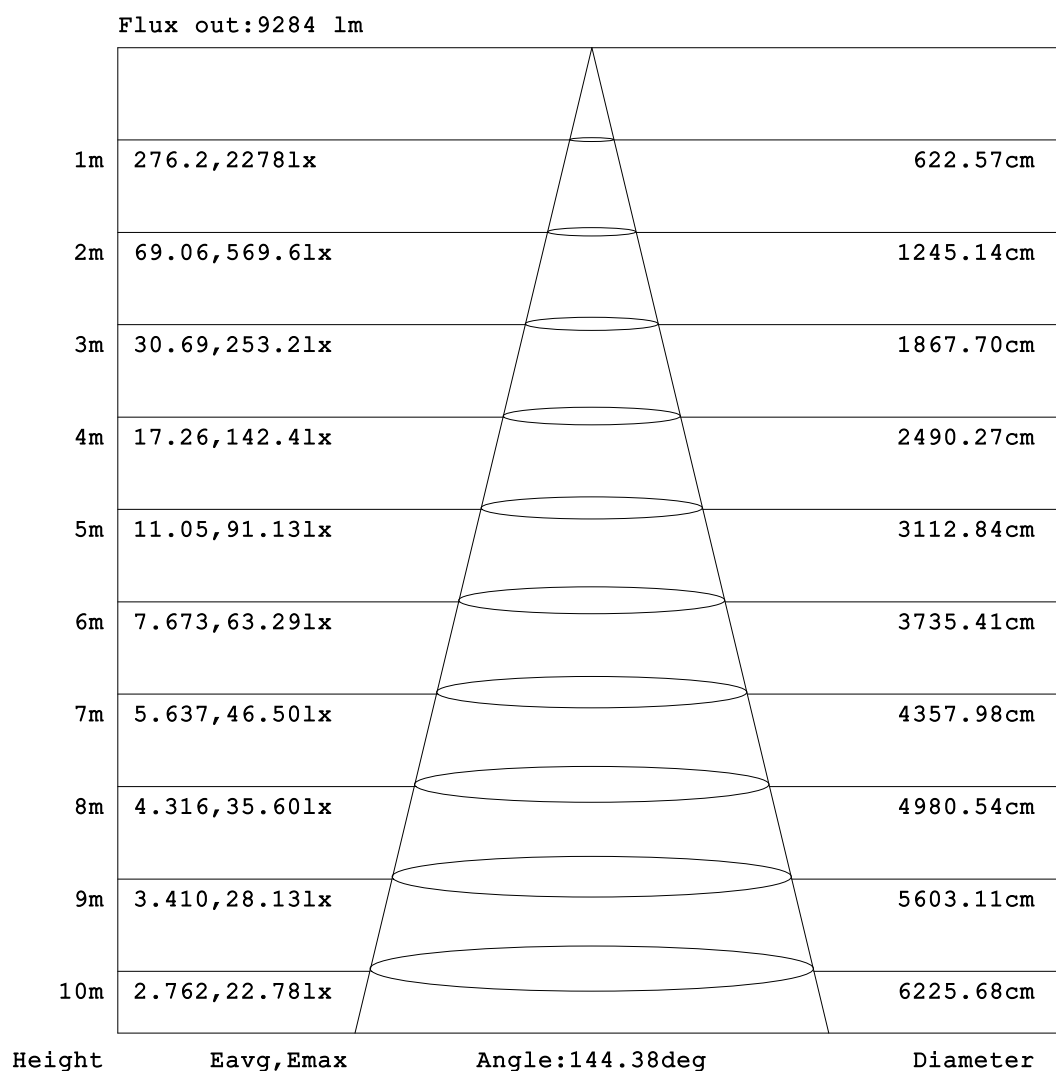


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:

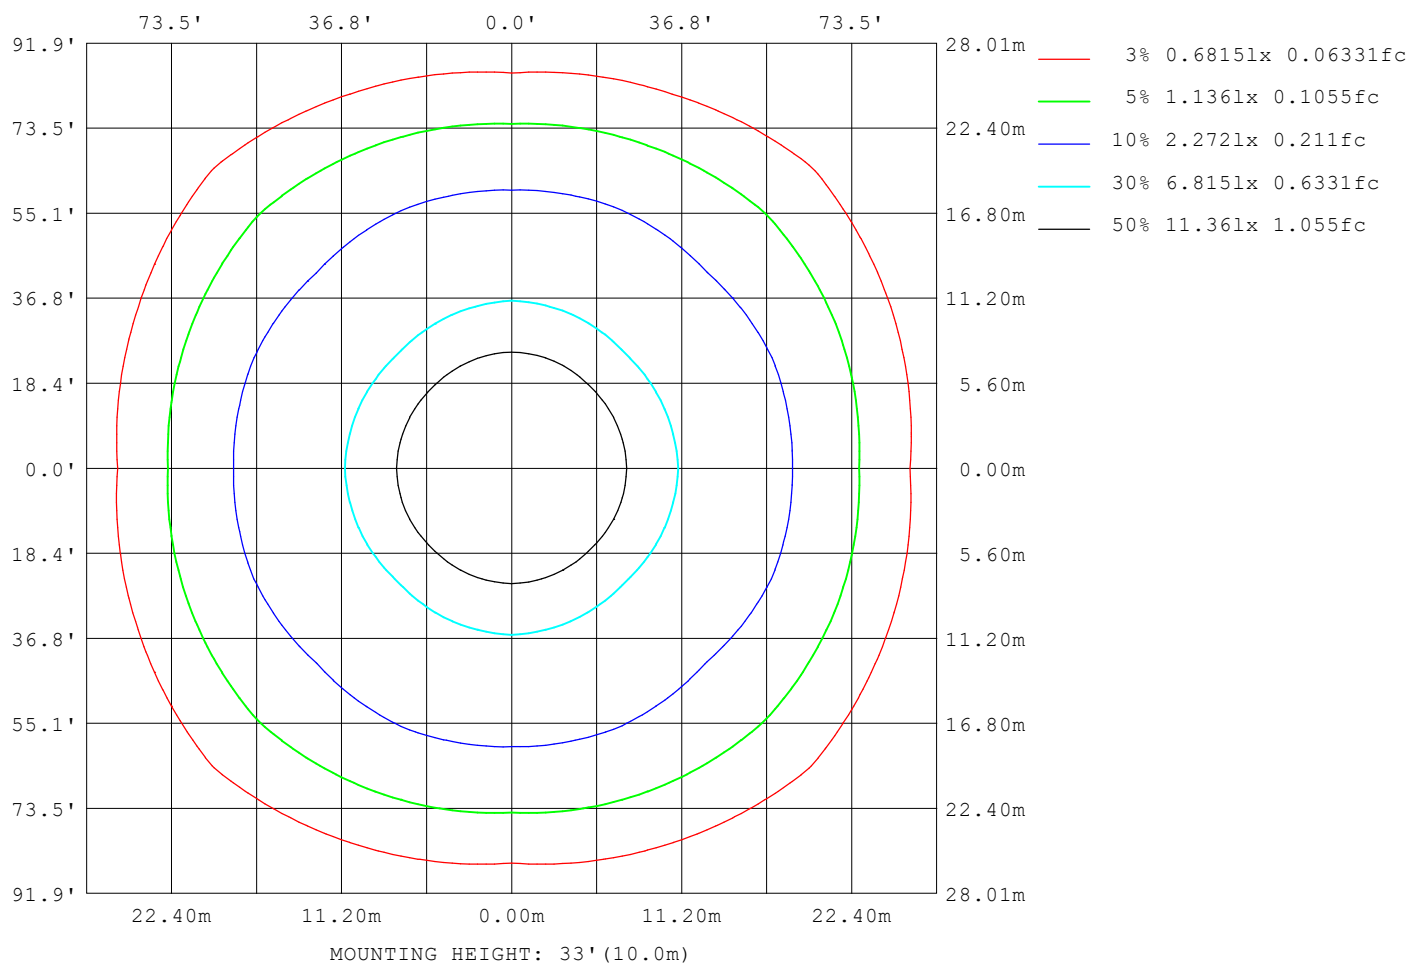

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:10745.8x1 lm		
NAME: CP02G-75L-CS-3CCT-Z	TYPE: 75W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.25*0.25	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	69962
L_0~180 (75) av	56063
L_0~180 (85) av	58944
L_90~270 (65) av	68956
L_90~270 (75) av	55504
L_90~270 (85) av	59915
L_45 (65) av	74623
L_45 (75) av	89366
L_45 (85) av	109839

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

Planar Illuminance Curve

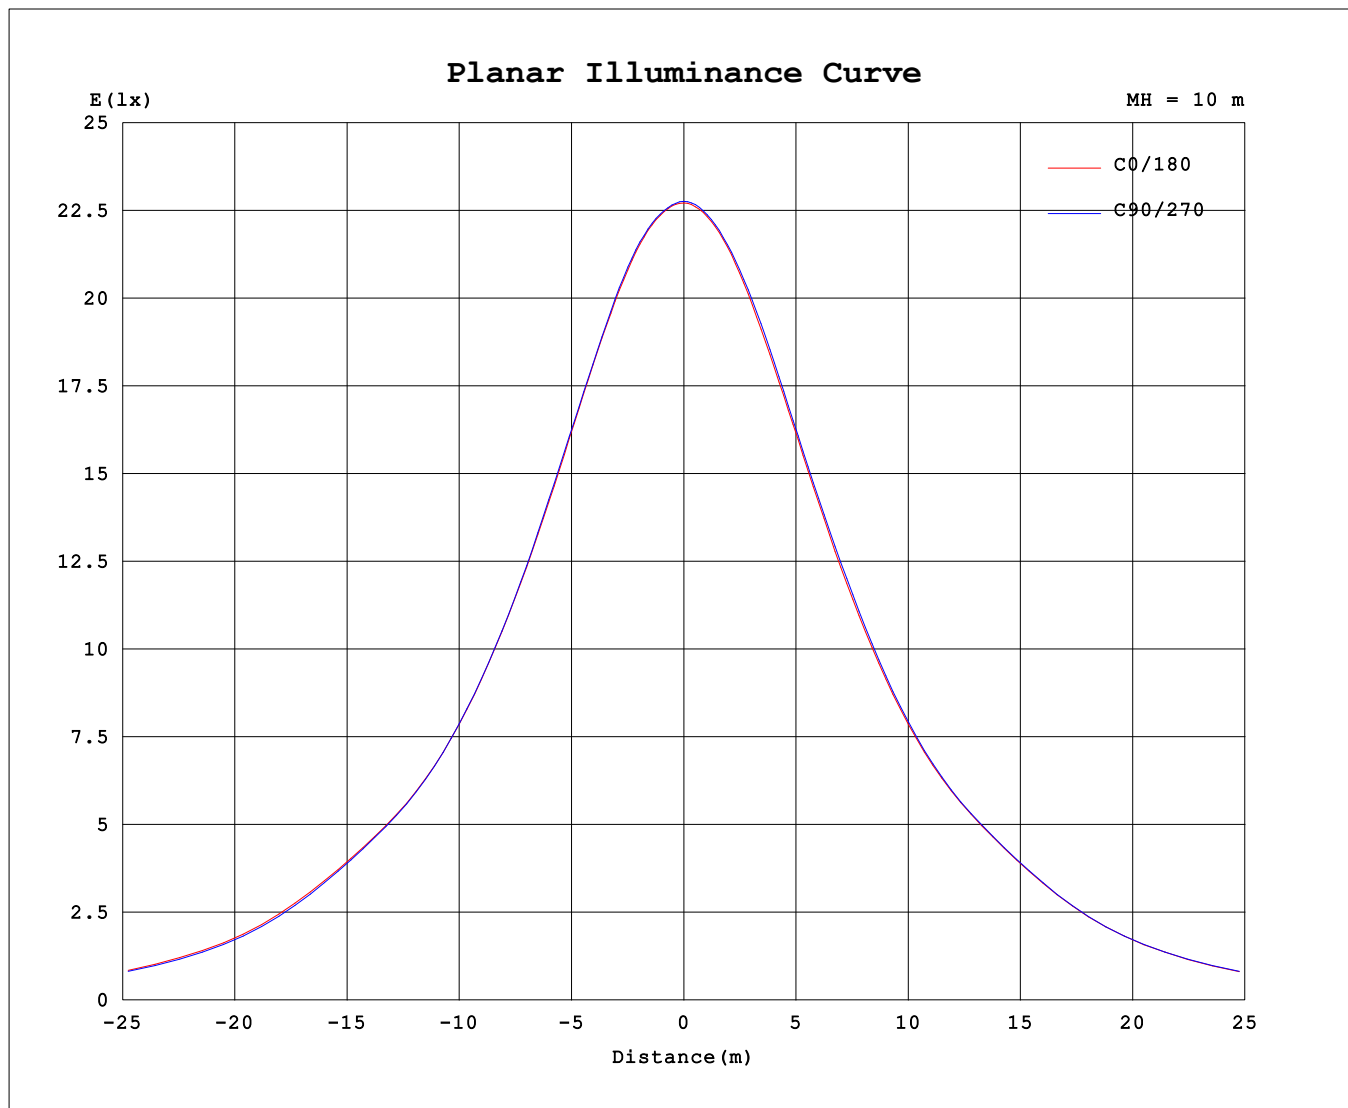

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 9.680m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.18V I:0.6103A P:72.324W PF:0.9944 Freq:60.01Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:10745.8x1 lm		
NAME: CP02G-75L-CS-3CCT-Z			TYPE: 75W			WEIGHT:		
SPEC.: 4000K			DIM.:			SERIAL No.: 1		
MFR.: EVERFINE			SUR.: 0.25*0.25			Shielding Angle:		

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2272	2273	2275	2275	2276	2278	2278	2278	2272	2273	2275	2275	2276	2278	2278	2278			
5	2273	2274	2275	2275	2276	2276	2276	2275	2270	2272	2274	2274	2275	2278	2279	2279			
10	2277	2278	2278	2282	2282	2280	2277	2274	2269	2270	2272	2274	2275	2277	2279	2281			
15	2278	2278	2285	2287	2286	2284	2281	2273	2267	2268	2272	2275	2279	2283	2283	2282			
20	2273	2275	2283	2280	2278	2278	2277	2269	2261	2263	2269	2274	2280	2282	2282	2277			
25	2267	2268	2272	2271	2274	2268	2264	2262	2259	2258	2261	2267	2276	2278	2273	2267			
30	2256	2255	2250	2261	2267	2257	2242	2253	2253	2249	2243	2256	2272	2268	2254	2254			
35	2247	2236	2213	2240	2253	2237	2209	2234	2244	2232	2213	2241	2270	2255	2219	2232			
40	2237	2212	2169	2210	2240	2209	2165	2210	2235	2210	2173	2224	2259	2237	2177	2208			
45	2225	2184	2122	2183	2228	2184	2118	2184	2225	2187	2129	2195	2244	2209	2135	2182			
50	2244	2166	2074	2157	2237	2164	2075	2169	2247	2175	2089	2173	2259	2192	2093	2162			
55	2309	2187	2040	2163	2290	2176	2050	2188	2295	2194	2060	2184	2304	2206	2066	2184			
60	2216	2177	2018	2139	2163	2156	2032	2153	2150	2155	2042	2149	2155	2163	2049	2181			
65	1882	1961	1954	1921	1822	1922	1968	1911	1813	1903	1972	1910	1821	1907	1990	1985			
70	1423	1598	1778	1563	1365	1562	1776	1551	1359	1548	1783	1564	1383	1556	1813	1627			
75	923	1129	1439	1115	883	1097	1425	1090	891	1088	1445	1122	912	1102	1473	1162			
80	557	706	1018	710	549	693	1000	688	550	692	1033	718	564	704	1057	732			
85	320	402	594	405	319	394	576	392	322	398	601	414	333	408	622	419			
90	124	154	201	153	121	149	196	149	123	153	207	177	132	178	222	183			
95	87.3	95.3	124	97.5	85.9	88.9	116	90.2	88.7	94.8	125	96.5	90.8	101	131	103			
100	64.9	63.6	43.5	48.2	57.6	46.7	21.1	52.4	65.8	55.2	32.0	55.4	67.1	56.2	56.1	68.0			
105	47.7	39.2	25.8	10.3	10.3	10.7	12.4	10.4	22.1	14.2	14.3	14.2	15.8	13.9	27.9	44.1			
110	37.8	31.3	17.1	18.1	11.6	17.7	13.7	13.9	15.3	15.6	16.6	18.4	15.0	17.5	21.4	35.8			
115	29.8	22.6	12.6	16.0	21.7	16.5	12.7	12.8	19.2	16.3	16.0	18.8	23.6	18.9	16.0	26.5			
120	13.9	13.7	13.8	13.9	13.9	13.8	14.2	14.0	17.3	17.1	17.4	16.9	17.2	17.1	16.9	17.0			
125	14.8	14.7	15.0	15.0	14.8	14.8	15.1	17.1	17.9	20.1	17.8	17.7	17.7	17.9	17.8	17.6			
130	15.7	15.8	16.2	16.1	15.9	16.0	16.3	16.2	18.9	18.8	18.8	18.6	18.5	18.7	18.7	18.5			
135	16.8	17.0	17.5	17.2	17.0	17.2	17.6	17.3	19.3	19.5	19.7	19.4	19.2	19.4	19.6	19.3			
140	17.9	18.2	18.6	18.3	18.1	18.4	18.8	18.4	20.2	20.3	20.5	20.3	20.0	20.3	20.5	20.3			
145	19.0	19.2	19.6	19.3	19.2	19.4	19.7	19.5	20.9	21.0	21.2	21.0	20.8	20.9	21.1	21.0			
150	19.9	20.0	20.3	20.1	20.0	20.2	20.4	20.3	21.4	21.4	21.6	21.5	21.3	21.4	21.6	21.5			
155	20.6	20.6	20.8	20.8	20.7	20.7	20.9	20.9	21.9	21.9	21.9	21.8	21.8	21.9	21.9	21.9			
160	21.1	21.1	21.2	21.2	21.2	21.2	21.2	21.2	22.0	22.0	21.9	21.9	21.9	22.0	22.0	22.0			
165	21.5	21.5	21.5	21.6	21.6	21.5	21.5	21.6	22.0	22.0	21.9	21.9	22.0	22.1	22.0	22.1			
170	21.7	21.7	21.8	21.8	21.8	21.7	21.7	21.8	22.0	22.0	22.0	22.0	22.0	22.1	22.1	22.1			
175	22.0	22.0	22.1	22.1	22.0	22.0	22.0	22.0	22.0	22.1	22.1	22.0	22.1	22.2	22.2	22.1			
180	22.1	22.1	22.2	22.1	22.1	22.1	22.2	22.2	22.1	22.1	22.2	22.1	22.1	22.2	22.2	22.1			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-05-05

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks: